



## DV4 Series

VarTech's flagship DiamondVue series of touchscreen monitor displays and flat panel computers are available in various mechanical/mounting designs and sizes.

The adaptive design of DiamondVue monitors and panel computers enables the same mechanical footprint for standalone displays and panel computers alike, expanding versatility to a wider range of industrial, commercial, and military applications.

New clip mount bezel options offer a slimmer design, and displays are easily mounted without having to drill holes. Expanded large and wide format screen sizes allow operators to have improved visibility and operability of HMI functions and process control.



DV4 series standard in black powder coat aluminum or stainless steel. Custom colored powder coating available.

### Standard Features:

- Industrial-grade LED back-lit LCD.
- Power input: 12 VDC, 9-36 VDC, or 90-264 VAC internal power supply
- Mounting configurations: panel with studs, panel with clips, console, console extreme, rack, chassis, VESA (100 mm VESA pattern for sizes 10.4" - 24", 200 mm VESA for 32", 300 mm VESA for 43"), or standard RAM
- Available touchscreens: resistive, PCAP, and ArmorTouch
- Operating temperature: -10° to 60° C (Extreme Temperature Package available depending on size. Please inquire.)
- Relative humidity: ≤ 90% to ≤ 95% (depending on mechanical build)
- Altitude: 10,000 ft MSL
- 2-year warranty

### Computer Features:

- Embedded computer
- Operating system: Windows 10 Professional 64-bit (standard)
- 2 × 10/100/1000 Mbps LAN
- 1 × front bezel USB (Type-A or Type-C available on NEMA 4, 11.6" and larger)

### Monitor Only Features:

- On Screen Display (OSD) controls

### Dimensions (W × H × D) Reference Chart:

Size	Panel with Studs Dimensions	VESA/RAM Dimensions	Rack Dimensions	Console & Console Extreme Dimensions	Panel with Clip Dimensions	Chassis Dimensions	Aspect Ratio	Brightness	Resolution
6.5"	9.63" × 8.38" × 3.75"	NA	4U 3.75" Depth	9.63" × 8.38" × 3.75"	8.88" × 7.63" × 3.75"	NA	4:3	650 nits 1300 nits ☀	XGA 1024 × 768 VGA 640 × 480
8.4"	11.25" × 9.5" × 3.75"	9.875" × 8.13" × 3.75"	5U 3.75" Depth	11.25" × 9.5" × 3.75"	10.5" × 8.75" × 3.75"	10.25" × 7" × 3.5"	4:3	600 nits 900 nits ☀	XGA 1024 × 768 XGA 1024 × 768
10.4"	13" × 10.5" × 3.75"	11.63" × 9.13" × 3.75"	6U 3.75" Depth	13" × 10.5" × 3.75"	12.25" × 9.75" × 3.75"	11.78" × 8.13" × 3.5"	4:3	400 nits 1300 nits ☀	SVGA 800 × 600 XGA 1024 × 768
11.6" wide	14.5" × 10.13" × 3.75"	13.13" × 8.75" × 3.75"	5U 3.75" Depth	14.5" × 10.13" × 3.75"	13.75" × 9.38" × 3.75"	13.5" × 7.63" × 3.5"	16:9	300 nits	FHD 1920 × 1080
12.1"	14.13" × 11.75" × 3.75"	12.75" × 10.38" × 3.75"	6U 3.75" Depth	14.13" × 11.75" × 3.75"	13.38" × 11" × 3.75"	13.13" × 9.25" × 3.5"	4:3	400 nits 1200 nits ☀	XGA 1024 × 768 XGA 1024 × 768
12.1" wide	14.75" × 10.88" × 3.75"	13.38" × 9.5" × 3.75"	6U 3.75" Depth	14.75" × 10.88" × 3.75"	14" × 10.13" × 3.75"	13.75" × 8.38" × 3.5"	16:10	500 nits 1500 nits ☀	WXGA 1280 × 800 WXGA 1280 × 800
15"	16.5" × 13.5" × 3.75"	15.13" × 12.13" × 3.75"	7U 3.75" Depth	16.5" × 13.5" × 3.75"	15.75" × 12.75" × 3.75"	15.5" × 11" × 3.5"	4:3	400 nits 1500 nits ☀	XGA 1024 × 768 XGA 1024 × 768
15.6" wide	18" × 12.13" × 3.75"	16.63" × 10.75" × 3.75"	7U 3.75" Depth	18" × 12.13" × 3.75"	17.25" × 11.38" × 3.75"	17" × 9.63" × 3.5"	16:9	400 nits 1500 nits ☀	FHD 1920 × 1080 FHD 1920 × 1080
17"	17.75" × 15.13" × 3.75"	16.38" × 13.75" × 3.75"	8U 3.75" Depth	17.75" × 15.13" × 3.75"	17" × 14.38" × 3.75"	16.75" × 12.63" × 3.5"	5:4	350 nits 1000 nits ☀	SXGA 1280 × 1024 SXGA 1280 × 1024
17.3" wide	19.5" × 12.88" × 3.75"	18.13" × 11.5" × 3.75"	NA	19.5" × 12.88" × 3.75"	18.75" × 12.13" × 3.75"	18.5" × 10.38" × 3.5"	16:9	400 nits 1000 nits ☀	FHD 1920 × 1080 FHD 1920 × 1080
18.5" wide	20.5" × 13.5" × 3.75"	19.13" × 12.13" × 3.75"	7U 3.75" Depth	20.5" × 13.5" × 3.75"	19.75" × 12.75" × 3.75"	19.5" × 11" × 3.5"	16:9	350 nits	FHD 1920 × 1080
19"	19.25" × 16.38" × 3.75"	17.88" × 15" × 3.75"	9U 3.75" Depth	19.25" × 16.38" × 3.75"	18.5" × 15.63" × 3.75"	18.25" × 13.88" × 3.5"	5:4	350 nits 1600 nits ☀	SXGA 1280 × 1024 SXGA 1280 × 1024
21.5" wide	23.25" × 15" × 3.75"	21.88" × 13.63" × 3.75"	NA	23.25" × 15" × 3.75"	22.5" × 14.25" × 3.75"	22.25" × 12.5" × 3.5"	16:9	300 nits 1500 nits ☀	FHD 1920 × 1080 FHD 1920 × 1080
24" wide	25.38" × 16.25" × 3.75"	24" × 14.88" × 3.75"	NA	25.38" × 16.25" × 3.75"	24.63" × 15.5" × 3.75"	24.38" × 13.75" × 3.5"	16:9	300 nits 1500 nits ☀	FHD 1920 × 1080 FHD 1920 × 1080
27" wide	28.25" × 18.13" × 3.75"	26.88" × 16.75" × 3.75"	NA	28.25" × 18.13" × 3.75"	27.5" × 17.38" × 3.75"	NA	16:9	300 nits 1000 nits ☀	FHD 1920 × 1080 FHD 1920 × 1080
32" wide	32.13" × 20.13" × 4.08"	30.75" × 18.75" × 4.08"	NA	32.13" × 20.13" × 4.08"	31.38" × 19.38" × 4.08"	31.13" × 17.63" × 3.5"	16:9	500 nits 1500 nits ☀	FHD 1920 × 1080 FHD 1920 × 1080
43" wide	NA	40.13" × 24" × 4.08"	NA	NA	40.75" × 24.63" × 4.08"	NA	16:9	500 nits 1500 nits ☀	FHD 1920 × 1080 FHD 1920 × 1080

☀ Sunlight readable LCD

DV4 dimensions differ from older models. If ordering a replacement unit please ask your sales representative for specifications.



Specification Chart:

Size	Resolution	Touchscreen*	Viewing Angle	Contrast	Referenced in tables below		Power Consumption** (Calculated at 12 V DC)	Approximate Weight** (Based on VESA Mount)
					Available Monitor I/O Ports	Available Computer I/O Ports		
6.5"	XGA 1024 × 768 VGA 640 × 480	Res/PCAP/AT	80°/80°/80°/60° 80°/80°/60°/80°	500:1 600:1	A, B, C	G, H, I, J	≈ 10 W ≈ 13 W	≈ 5.5 Lbs
8.4"	XGA 1024 × 768 XGA 1024 × 768	Res/PCAP/AT	88°/88°/88°/88° 88°/88°/88°/88°	500:1 600:1	A, B, C	G, H, I, J	≈ 15 W ≈ 21 W	≈ 7 Lbs
10.4"	SVGA 800 × 600 XGA 1024 × 768	Res/PCAP/AT	80°/80°/80°/80° 80°/80°/65°/65°	1000:1 700:1	A, B, C	G, H, I, J	≈ 11 W ≈ 24 W	≈ 8.5 Lbs
11.6" wide	FHD 1920 × 1080	AT	80°/80°/80°/80°	800:1	B, C	G, H, I, J	≈ 13 W	≈ 9.5 Lbs
12.1"	XGA 1024 × 768 XGA 1024 × 768	Res/PCAP	85°/85°/85°/85° 85°/85°/85°/85°	750:1 750:1	A, B, C, D	G, H, I, J	≈ 9 W ≈ 22 W	≈ 9.5 Lbs
12.1" wide	WXGA 1280 × 800 WXGA 1280 × 800	Res	85°/85°/85°/85° 80°/80°/80°/60°	750:1 700:1	A, C, D	G, H, I, J	≈ 17 W ≈ 34 W	≈ 10 Lbs
15"	XGA 1024 × 768 XGA 1024 × 768	Res/PCAP/AT	80°/80°/80°/80° 80°/80°/60°/80°	600:1 800:1	A, C, D	E, F, G, I	≈ 12 W ≈ 47 W	≈ 13 Lbs
15.6" wide	FHD 1920 × 1080 FHD 1920 × 1080	Res/PCAP/AT	80°/80°/70°/70° 88°/88°/88°/88°	700:1 750:1	C, D	E, F, G, I	≈ 16 W ≈ 49 W	≈ 13.5 Lbs
17"	SXGA 1280 × 1024 SXGA 1280 × 1024	Res/PCAP/AT	80°/80°/60°/80° 80°/80°/60°/80°	800:1 1000:1	A, C, D	E, F, G, I	≈ 25 W ≈ 62 W	≈ 14.5 Lbs
17.3" wide	FHD 1920 × 1080 FHD 1920 × 1080	PCAP/AT	80°/80°/60°/80° 80°/80°/60°/80°	600:1 600:1	C, D	E, F, G, I	≈ 20 W ≈ 49 W	≈ 14.5 Lbs
18.5" wide	FHD 1920 × 1080	Res/PCAP/AT	89°/89°/89°/89°	1000:1	C, D	E, F, G, I	≈ 19 W	≈ 15 Lbs
19"	SXGA 1280 × 1024 SXGA 1280 × 1024	Res/PCAP/AT	85°/85°/80°/80° 85°/85°/80°/80°	1000:1 1000:1	A, C, D	E, F, G, I	≈ 20 W ≈ 60 W	≈ 15.25 Lbs
21.5" wide	FHD 1920 × 1080 FHD 1920 × 1080	Res/PCAP/AT	89°/89°/89°/89° 89°/89°/89°/89°	5000:1 1000:1	C, D	E, F, G, I	≈ 24 W ≈ 42 W	≈ 15.5 Lbs
24" wide	FHD 1920 × 1080 FHD 1920 × 1080	PCAP/AT	89°/89°/89°/89° 89°/89°/89°/89°	5000:1 1000:1	C, D	E, F, G, I	≈ 9 W ≈ 34 W	≈ 16.75 Lbs
27" wide	FHD 1920 × 1080 FHD 1920 × 1080	PCAP	89°/89°/89°/89° 78°/78°/78°/78°	3000:1 1000:1	C, D	E, F, G, I	≈ 35 W ≈ 56 W	≈ 38 Lbs
32" wide	FHD 1920 × 1080 FHD 1920 × 1080	PCAP	89°/89°/89°/89° 89°/89°/89°/89°	3000:1 4000:1	C, D	E, F, G, I	≈ 10 W ≈ 126 W	≈ 41 Lbs
43" wide	FHD 1920 × 1080 FHD 1920 × 1080	NA	89°/89°/89°/89° 89°/89°/89°/89°	3000:1 4000:1	C, D	E, F, G, I	≈ 66 W ≈ 155 W	≈ 65 Lbs

\* Res - resistive touch, PCAP - projective capacitive touch, and AT - ArmorTouch glass-on-film resistive touch

\*\* Power consumption and approximate weight based on aluminum monitor

LCD Controller Board Specifications:

Option	Resolution	Available Video I/O Ports	Horizontal/Vertical Scan
A	Up to 1440 × 900, 8-bit	1 × DVI, 1 × VGA	60 Hz up to 1440 × 900
B	Up to 1600 × 1200, 8-bit	1 × DVI, 1 × VGA, 1 × Composite (PAL/NTSC)	60 Hz up to 1600 × 1200
C	Up to 1920 × 1200, 8-bit	1 × HDMI, 1 × Display Port 1 × VGA	60 Hz up to 1920 × 1200
D	Up to 1920 × 1200, 10-bit	1 × HDMI, 1 × DVI, 1 × VGA 1 × Composite (PAL/NTSC)	60 Hz up to 1920 × 1200

Non-standard controller boards and I/O ports available depending on panel size. Please inquire.

Standard Motherboard Specifications:

Option	Processor	Memory	Storage Drive	Operating System	Available I/O Ports
E*	Intel J1900 Quad-Core	Up to 8 GB	1 × SATA-300 1 × mSATA/SIM	Win 7: 32/64-bit, Win 10: 32/64-bit	2 × RS-232/422/485 3 × USB 2.0 1 × USB 3.0 2 × LAN PS/2 KB/M
F*	Intel Atom E3845	Up to 8 GB	1 × SATA-300 1 × CFAST	Win 7: 32/64-bit, Win 10: 32/64-bit	1 × RS-232/422/485 2 × USB 2.0 2 × LAN
G*	i5-7300U	Up to 16 GB	1 × SATA-300 1 × mSATA/SIM	Win 10: 64-bit	2 × RS-232/422/485 4 × USB 3.0 2 × LAN
H	Celeron G3900TE, i3-6100TE, i5-6500TE, i7-6700TE	Up to 32 GB	3 × SATA-600 1 × mSATA	Win 10: 64-bit	1 × RS-232/422/485 1 × RS-232 4 × USB 3.0 1 × DisplayPort 2 × LAN

Non-standard motherboards and processors available depending on panel size. Please inquire.

Motherboard selection may affect operational temperature

\* Fanless operation available

Available Options:

- Dimming: Manual dimmer dial - 1000:1 dimming ratio, or auto-dimming
- Optical bonding (VBOND): adhering a cover glass, protective overlay, or touchscreen to the front surface of the LCD using an optical-grade silicone to increase solar reflectivity and ruggedness.
- Private labeling: company logo or corporate identity for OEM/VAR applications
- Coatings: custom powder coats, paint, and chemical resistant finishes
- Internal conformal coating: protection from moisture, dust, and corrosion
- Fanless design: solid-state components

Computer Options:

- 1 × VGA, 1 × HDMI
- Operating system: Windows 10 Professional - 32 & 64-bit, Windows 10 Enterprise, Windows 7 - 32 & 64-bit, Linux (select versions of Linux supported)
- Additional and/or alternate I/O ports available: Please contact your sales representative
- Storage: HDD, SSD, removable drives, various capacities, multiple drives
- Expansions: PCI, PCIe, mPCIe, M.2, SIM card slot
- ThinManager® thin client management
- Wireless connectivity: Bluetooth, WiFi, integrated router/WiFi repeater

Monitor Only Features:

- 1 × front bezel USB pass-through, Type-A or C (not available on chassis mount)
- OSD button placement: OSD membrane control buttons can be mounted in alternate locations on front or rear of the display (front mounting options not available on all mechanical designs), or wired remote OSD
- OSD options: Bluetooth control, IR remote, programmable hotkeys, RS-232
- OSD control (PC APP or serial commands)
- HD-SDI input add-on available
- Display options: USB failover, PiP
- Audio pass-through
- Integrated KVM extender
- Legacy video support: 15 kHz to 30 kHz, and SOG/composite/separate horizontal and vertical sync

Environmental Functional Upgrade Packages available. See next page.

All available options are subject to mechanical design limitations. Please inquire.



**Environmental Functional Upgrade Packages:**


VarTech's Environmental Functional Upgrade Packages allow for custom COTS solutions using standard feature sets.

High Bright Sunlight Readable Package	Component Ruggedization Package	Extreme Temperature Package (-40° C to 70° C)
<ul style="list-style-type: none"> <li>• High luminance LED backlights</li> <li>• Proprietary optical film stack</li> <li>• Optical bonding of protective window or touchscreen to LCD</li> <li>• Anti-reflective coatings</li> <li>• Brightness levels ranging from 700 nits to 1500 nits (depending on screen size)</li> <li>• Dimming: Manual dimmer dial - 1000:1 dimming ratio, or auto-dimming</li> <li>• Optional: backlight kill switch</li> </ul>	<ul style="list-style-type: none"> <li>• Shock/Vibration resistance: video controller board or motherboard, cable assemblies/connectors</li> <li>• Potted components where applicable</li> <li>• Vibration dampening</li> <li>• Optical bonding of protective window or touchscreen to LCD</li> <li>• MIL-DTL 38999 I/O connectors (not available on hazardous area models)</li> </ul> <p>Designed to meet tolerances specified by select subcategories of MIL-STD 810F and/or DEFSTAN 00-35 inclusive of Part 3 Issue 4.</p>	<ul style="list-style-type: none"> <li>• Integrated heater and thermostat</li> <li>• Wide temperature LCD panel</li> <li>• Harsh environment video controller board or motherboard/SSD/RAM</li> <li>• Optional: heat-reflective powder coat</li> <li>• Optional: uninterrupted wide temperature dual Power Supply Unit (PSU) system</li> </ul>

EMI/EMC 461 FS Package	NVIS Dual Mode Compatibility Package	Vandal/Impact Resistant Package
<ul style="list-style-type: none"> <li>• EMI protection front surface</li> <li>• Protective window or touchscreen equipped with 8 Ohm ITO for surface ship limits and 100 OPI SSTL mesh or 160 OPI copper printed mesh for Army ground limits</li> <li>• Chromated metal and EMI copper conductive tape to assure conductivity of ITO/busbar and enclosure</li> <li>• Enhanced EMI conductive gaskets for MIL-STD 461 protection while maintaining seal up to IP66 at front panel surface</li> <li>• CE101, CE102, CS101, CS106, CS114, CS115, CS116, RE101, RE102, RS101, RS103 (Designed to meet based on similar VarTech Systems Designs)</li> </ul> <p>This package is typically coupled with a flush or panel mount design</p>	<ul style="list-style-type: none"> <li>• NVIS MIL-STD 3009 class B green (night mode)</li> <li>• Brightness levels from 4 nits to 30 nits (night mode)</li> <li>• Toggle between day/night mode via the one-touch tactile button</li> <li>• Dimming: Manual dimmer dial - 1000:1 dimming ratio, or auto-dimming</li> <li>• ITAR restrictions apply</li> <li>• Optional: backlight kill switch</li> </ul>	<ul style="list-style-type: none"> <li>• Impact resistant protective overlay glass</li> <li>• 8H abrasion-resistant overlay glass</li> <li>• Chemical and stain resistant glass and surfaces</li> <li>• Tamper-proof conduit connectors</li> <li>• Optional: PCAP touchscreen</li> </ul>

Railway Ruggedization Package (Built to meet EN50155)
<ul style="list-style-type: none"> <li>• 24, 48, 72, 96, and 110 VDC Nominal Inputs Available (Complies with EN50155, Meets EN50121-3-2)</li> <li>• Universal Power Input Screw Terminal Connector</li> <li>• Vibration dampening</li> <li>• Reverse polarity protection</li> <li>• Fanless</li> <li>• Fuseless</li> <li>• Protective coating on all Circuit Boards</li> <li>• Optical bonding of protective window or touchscreen to LCD</li> <li>• Optional: M-Series connectors or D38999 connectors</li> </ul>

**Standard I/O Connectors:**

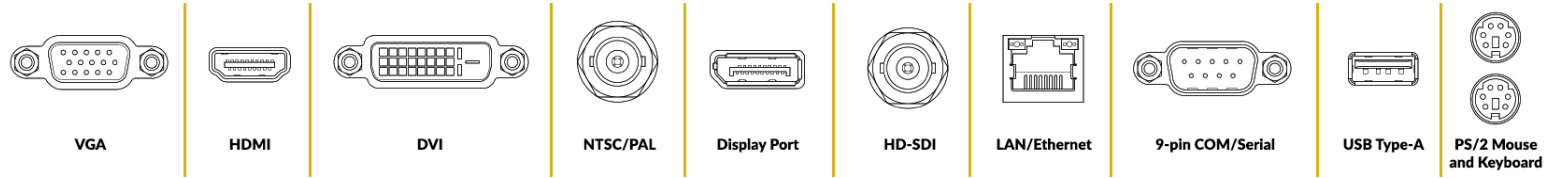


**Available Ruggedized I/O Connectors:**

M8/M12/M23: industrial automation, vibration and shock-resistant


MIL-DTL 38999: military standard, sealed, vibration and shock-resistant quick-coupling circular locking connectors



Mounting Option Examples:




Panel with clips




Panel with studs




VESA or standard RAM



Console and console extreme




Rack



Chassis

DiamondVue Core Model Number Breakdown:

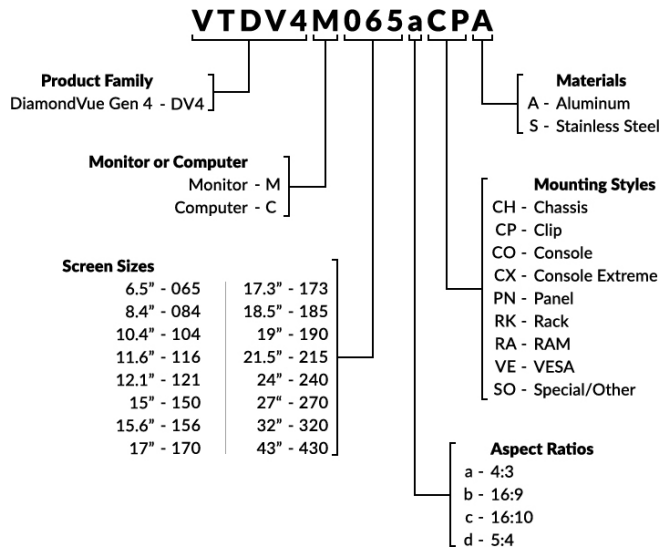

Over 30 Years of Rugged HMI and Industrial Computer Manufacturing Experience

